TRUCK CHASSIS MZKT-800500-011

VOLAT

TRUCK CHASSIS MZKT-800500-011

SPECIFICATIONS

PERFORMANCE DATA

14x14
45
19
2x500

WEIGHT DATA

Curb chassis weight, kg	39 200
Gross vehicle weight, kg	94 200
Permissible weight on axles, kg	
1 - 3 axles	40 400
4 - 7 axles	53 800
Payload, kg	55 000

ENGINE (2 PCS)

L6 Number and location of cylinders 433 kW (580 h.p.) at 2 100 min⁻¹ Max. power 2 383 Nm at 1 400 min⁻¹ Max. torque

TRANSMISSION (2 PCS)

Гуре	automatic
Number of gears	6 forward, 1 reverse
Gear ratio	7.63-0.74 R4.80

TRANSFER CASE

1-speed, with symmetrical cross-axle differential lock

DRIVING AXLES

Rigid, with central reduction gears, interaxle and cross-axle differential lock 1-3 and 5-7 axles - steered

AXLE SUSPENSION

Dependent hydrobalaced

BRAKE SYSTEM

Drum brakes of shoe-type with pneumatic drive Dual-circuit system

TYRES

445/65R22.5, offroad Central tyre inflation system (CTIS) Number of wheels - 14+1

FRAME


Longitudinal Equipped with two front towing units Platform flooring with one-side corrugation

CAB

1-seat full-metall Equipped with ventilation and heating systems Heated rear-view mirrors

ELECTRICAL EQUIPMENT

Nominal voltage 24V Single-wire Batteries 4x190 Ah Battery storage with ventilation and heating

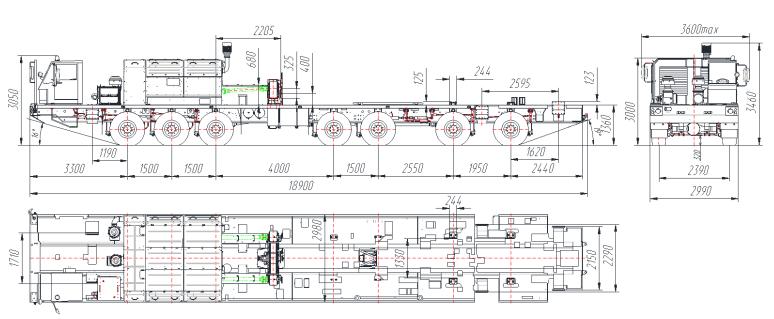

* Specifications can be clarified in the process of improving the design

Tel.: +375 (17) 330-19-54; Fax.: +375 (17) 291-31-92; E-Mail: link@mzkt.by www.mzkt.by